flyUP :: Technology

Product Specifications

Single & dual color Asynchronous control card




HD-C30

Overview:

HD-C30 4G internet USB LED control card has 4G flash memory, more than 2 hours program support, indefinite expanding of U-disk memory. It supports to display video, Image and text editing. It recommended full color: 640*480, 1024*300, 600*512 pixels. Its max height and length is (1024 pixels and 512 pixels). It support static: 1/4, 1/8, 1/6, 1/3, 1/5 scan LED modules etc.

Features:

- HD-C30 has 4G flash memory.
- It time switch is defined setting to turn on and turn off.
- It time effect I supporting perpetual calendar and virtual- clock effect.
- C30 is working temperature -30+70C.
- HD-C30 has 1024 pixels height and 512 pixels length.

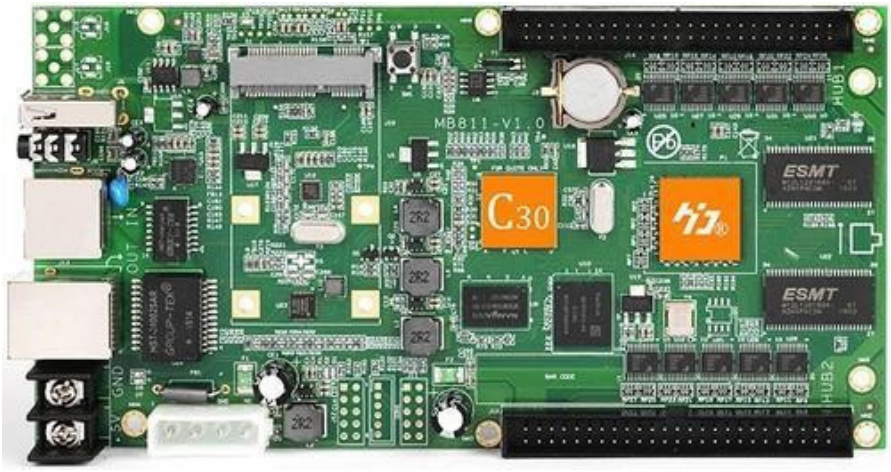

Specifications:

Content	Performance
Usage/Application	LED Lighting
Card Number	HD-C30
Brand	Huidu
LED display sizes	640*480,1024*300,600*512 pixels ,max height 1024 pixels ,max length 512 pixel
Built-in Memory	4GB
Supported modules	Full color
Video	AVI, WMV, MP4 3GP, ASF, MPG, FLV, F4V, MKV, MOV, DAT, VOB, TRP, TS and WEBM etc.
Image formats	BMP, GIF, JPG, JPEG, PNG, GIF, PBM, PGM, PPM, XPM and XBM etc.
Connection type	10/100M/1000M RJ45 Ethernet / 3G / Internet / LAN / built-in Wi-Fi module
Voltage	4.5-5.5 V
Operating Temperature	-30°C~70°C