
RGB-HD P3 Indoor LED Module

Model	⟷	P3
LED Type	⟷	SMD
Color	⟷	Full Color
Panel Size	⟷	192*192mm
Pixel Pitch	⟷	3mm
Place of Origin	⟷	Shenzhen Chaina

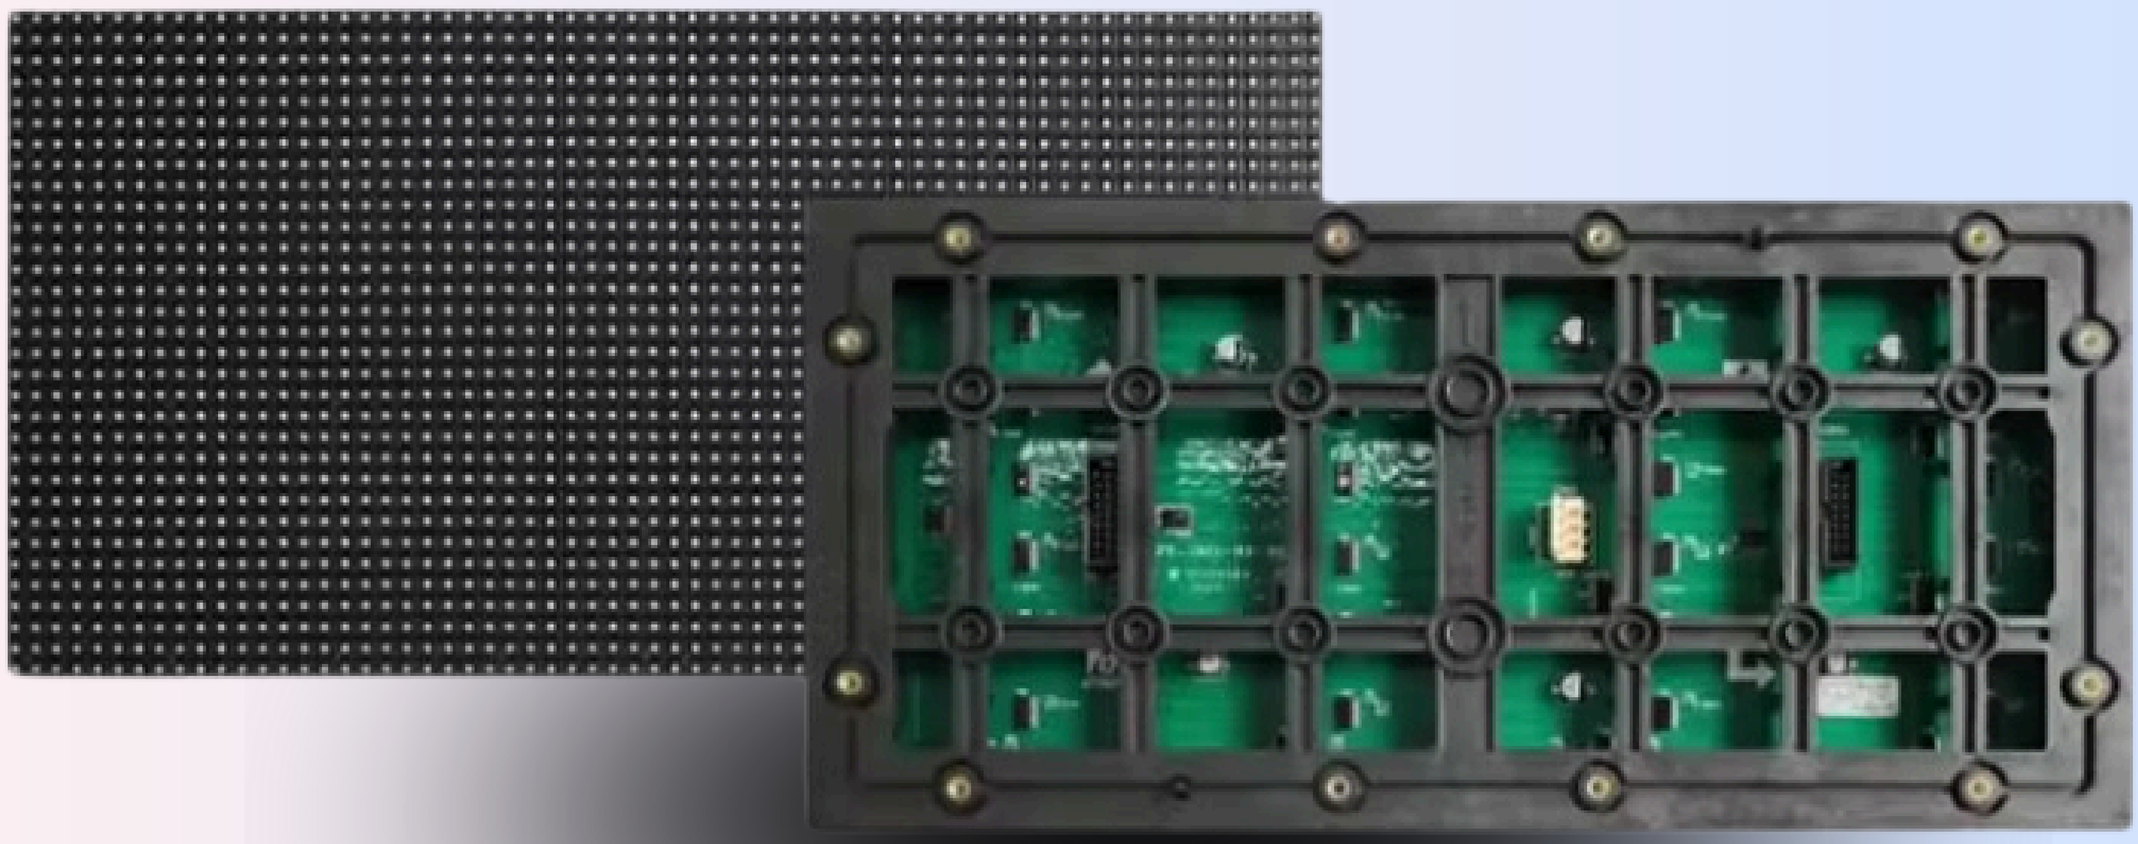

Soalteemode, Kathmandu

98510939960

flyuptechnology.com


Parameter	Detail
Type	HDP3 indoor type
Brightness of HDP3	1500-2000 CD/M
Viewing angle	160 degree c
Cabinet resolution	192*192 dots
Module Size	192mmX192mm
Module Resolution	64 X 64 (dots)
Density of pixel	111111 dots/m2
Pixel configuration of HDP3	1R1G1B
Red wavelength	625±2nm
Green wavelength	525±2nm
Blue wavelength	470±2nm
Colors	16777216
Best viewing distance	≥2.5m
viewing angle	120°/90°
Maximum power consumption	20W
Brightness of HDP3	900cd/m2
Gray scale	14 bits per color
Color temperature	6500k

Soalteemode, Kathmandu

98510939960

flyuptechnology.com

Control method	Synchronization or Synchronization
Driving method	1/32 scanning
Frame frequency of HDP3	60Hz
Refresh frequency	≥600Hz

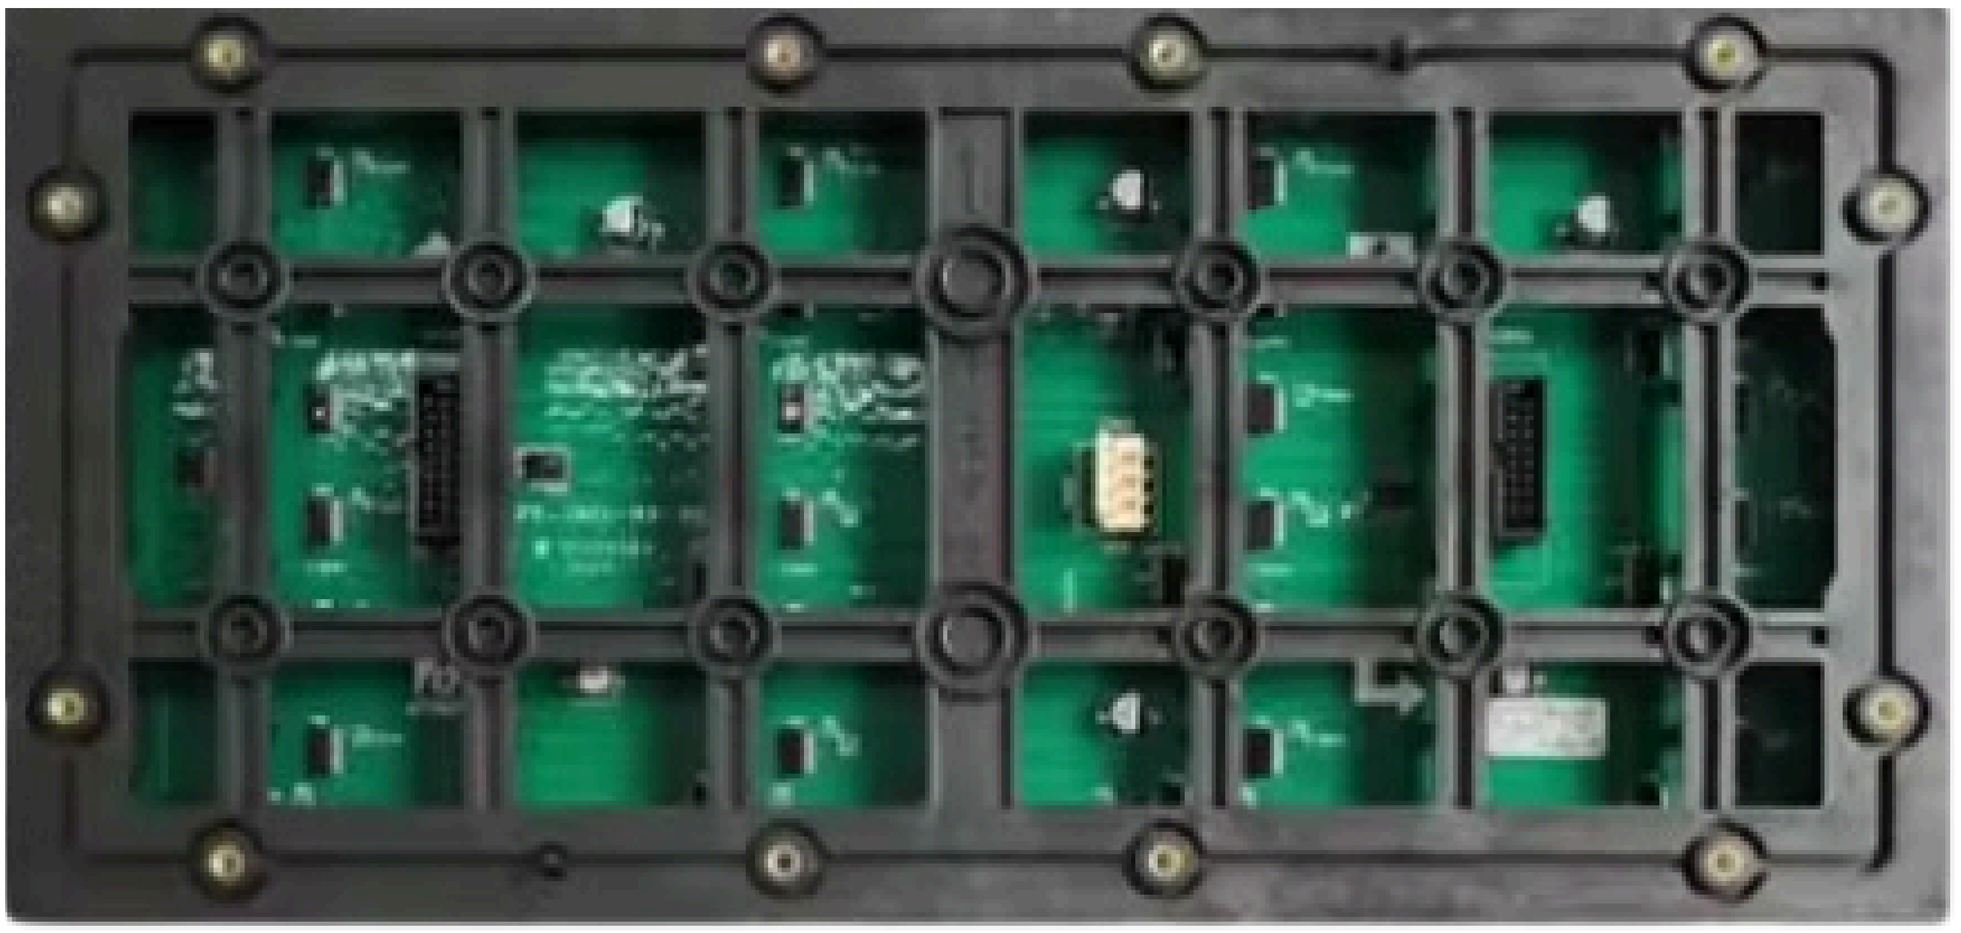


Soalteemode, Kathmandu

98510939960

flyuptechnology.com

LED Module Accessories: Included

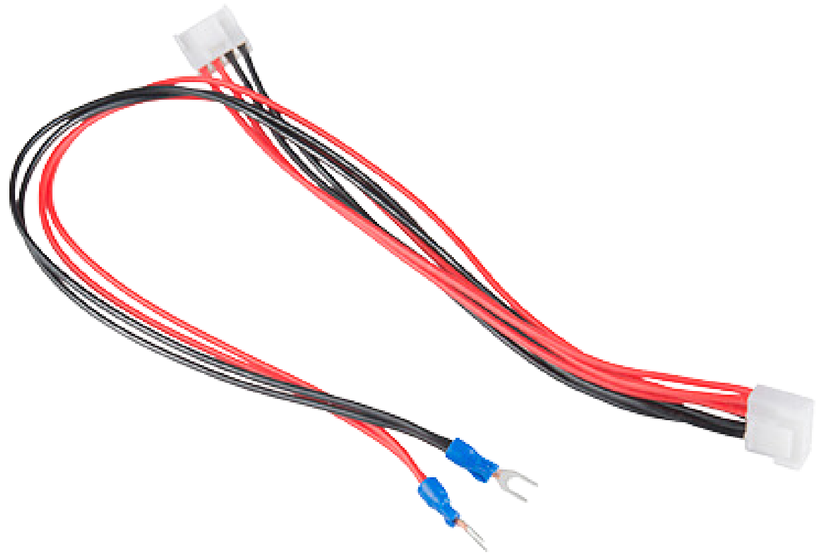

1- Power Cabel



4- Magnet



1- FRC Cable

Soalteemode, Kathmandu

98510939960

flyuptechnology.com