
P8 Outdoor LED Display

Model	⟷	P8
LED Type	⟷	SMD
Color	⟷	Full Color
Panel Size	⟷	320*160mm
Pixel Pitch	⟷	8mm
Place of Origin	⟷	Shenzhen Chaina

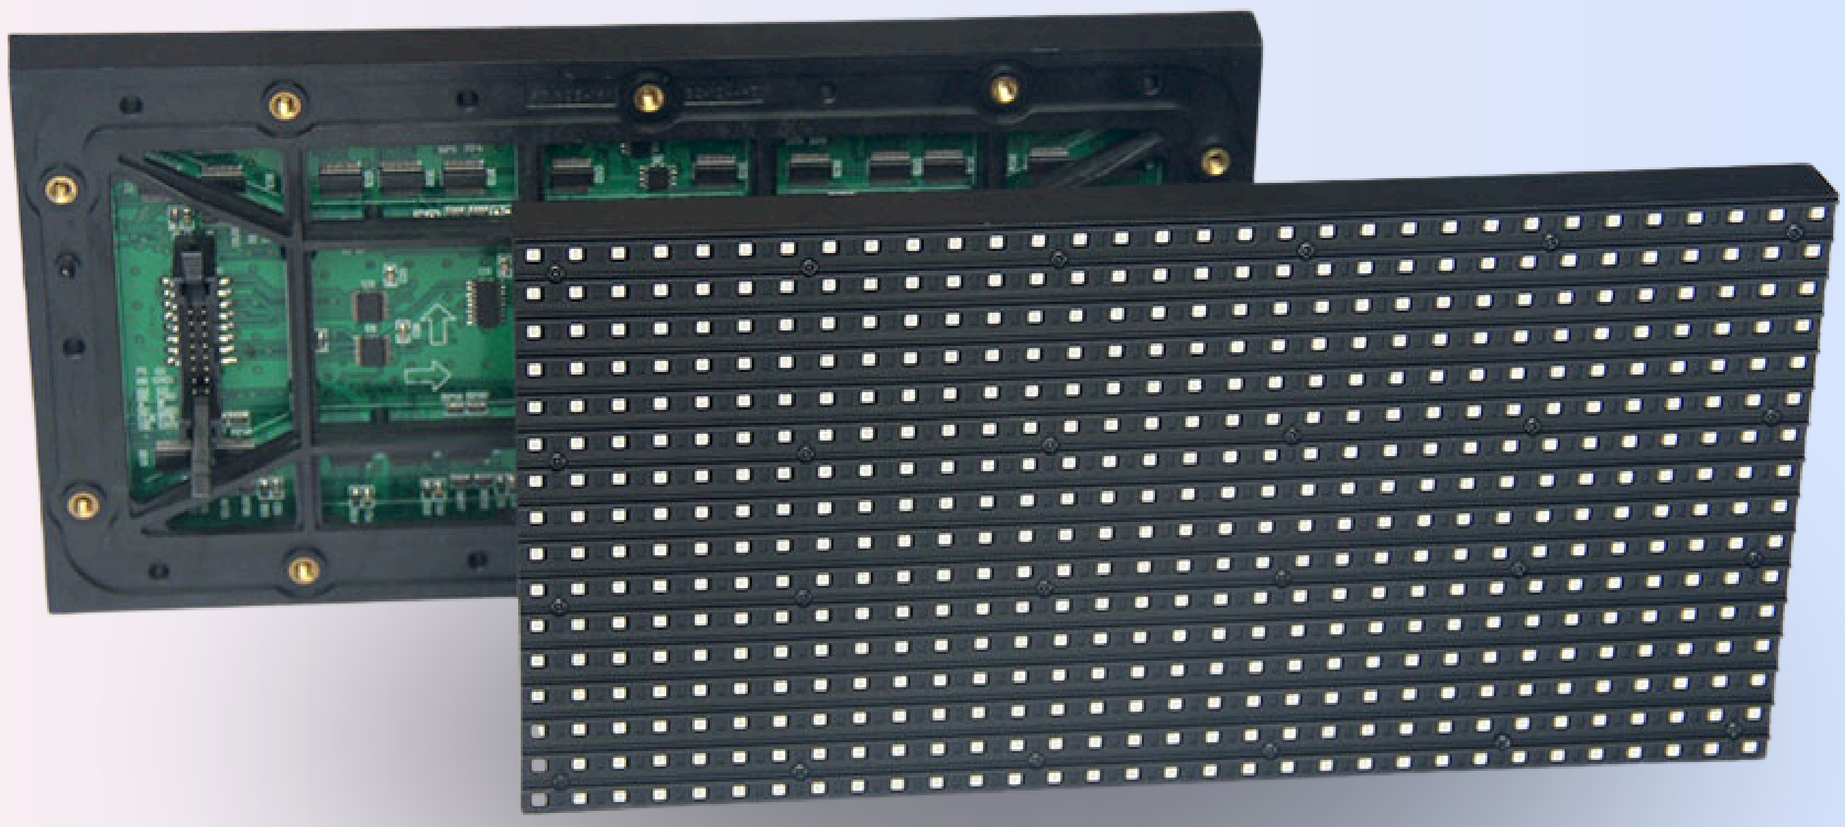

Soalteemode, Kathmandu


98510939960

flyuptechnology.com

Parameter	Detail
Max. Brightness	>5500cd/sqm
Best Viewing Distance	8M – 50M
P8 Driving Method	1/5 scan, constant current
Viewing Angle	Horizontal/Vertical: 140°±10°
P8 Brightness Control	R,G ,B 256 grade/each
Refresh Rate	1920Hz
Frame Frequency	60Hz
Input Voltage	AC220V ± 5%
Power Consumption	Max.:440W Average: 310W
MTBF of P8	>10,000 hours
Life-span	≥100,000 hours(50% brightness)
Humidity-Operating	10%～95%
Operation Temperature	－28℃～ + 56℃
P8 Power Supply	5V-40A-200W
Input Signal	DVI,VGA,HDMI,SDI,S-video etc.
Driving IC	5020

Soalteemode, Kathmandu

98510939960 flyuptechnology.com

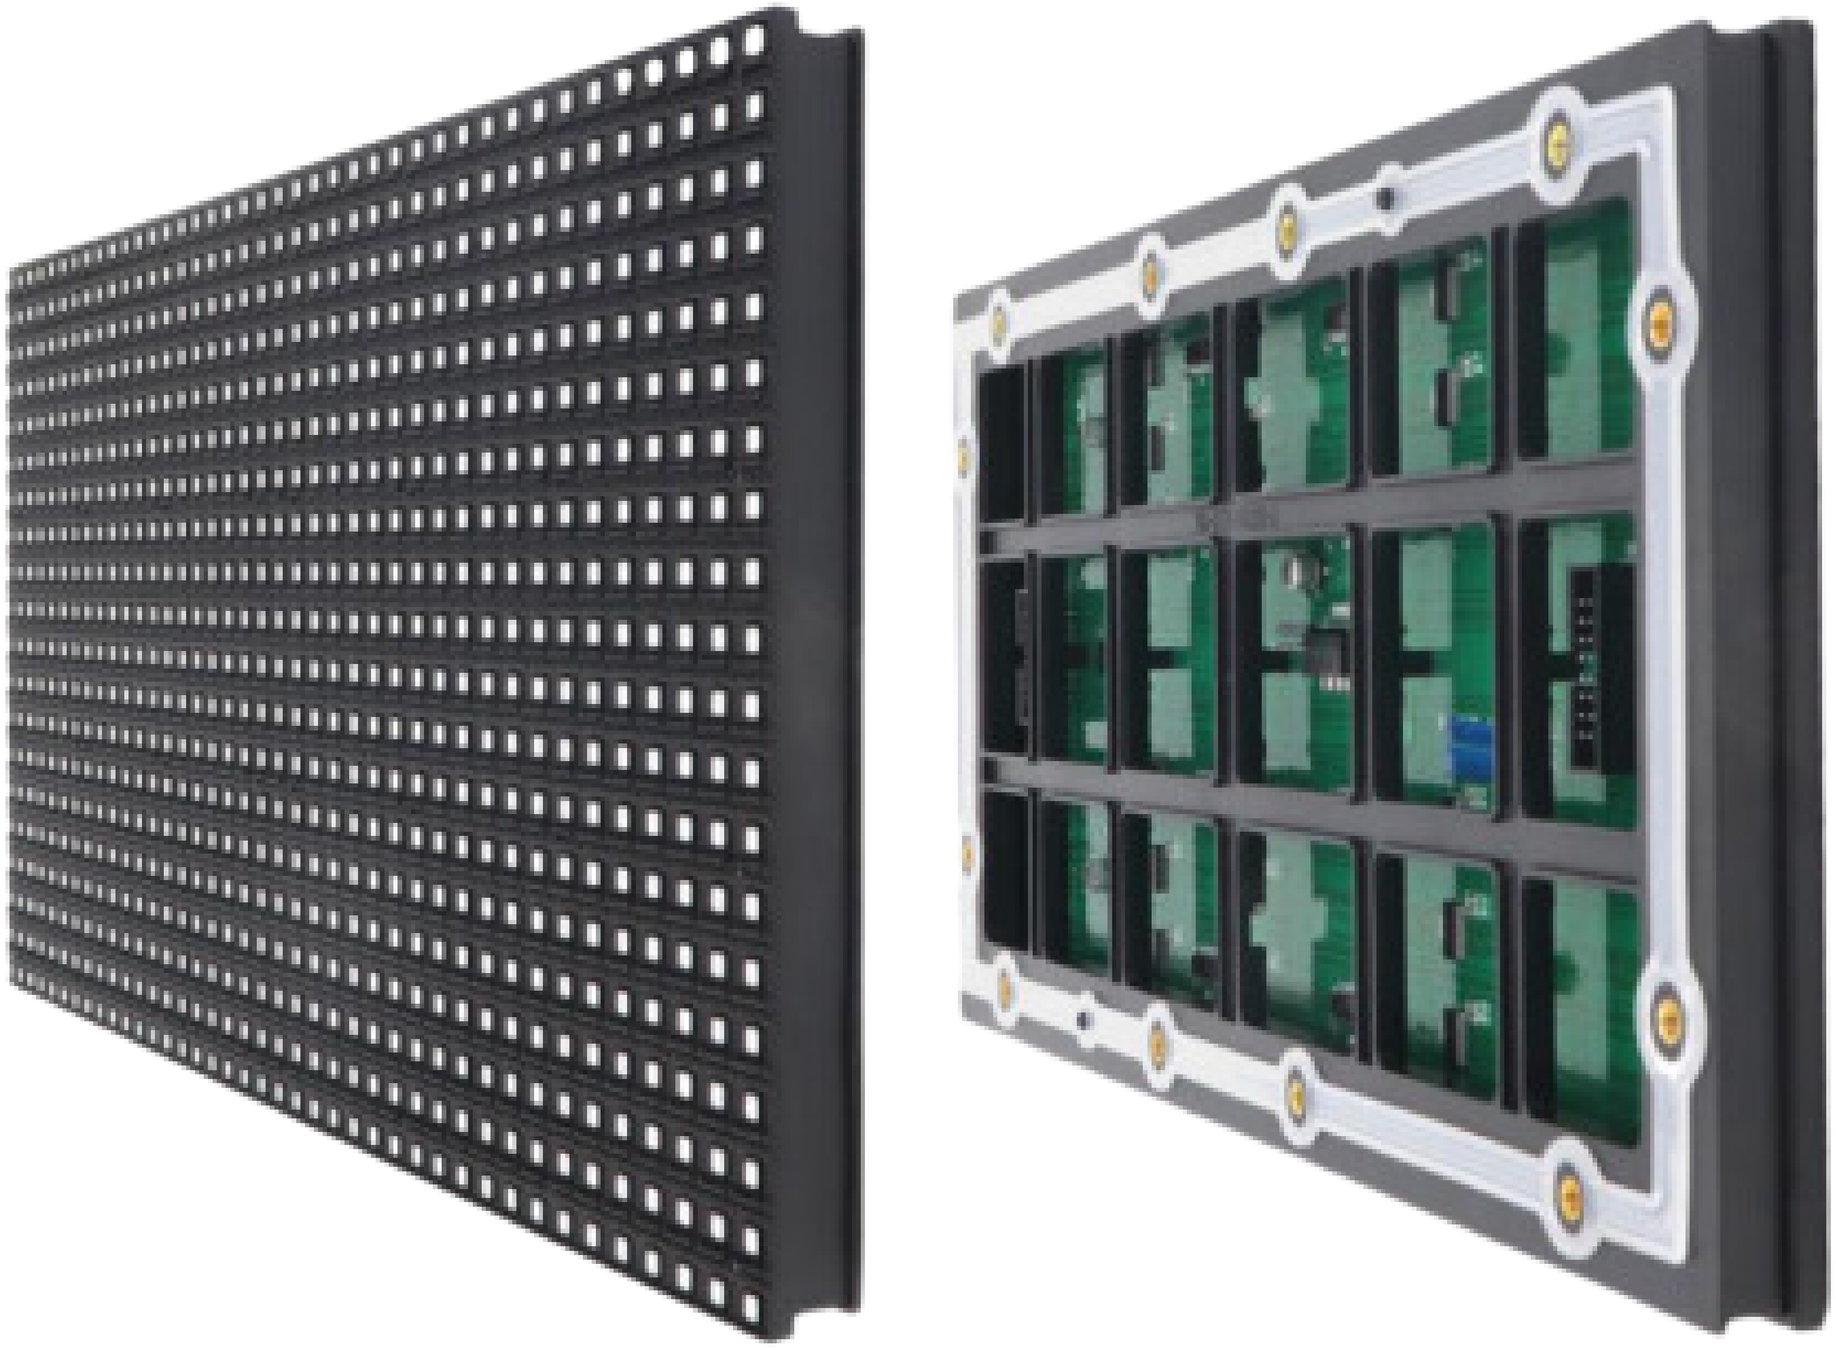


Soalteemode, Kathmandu

98510939960

flyuptechnology.com

LED Module Accessories: Included

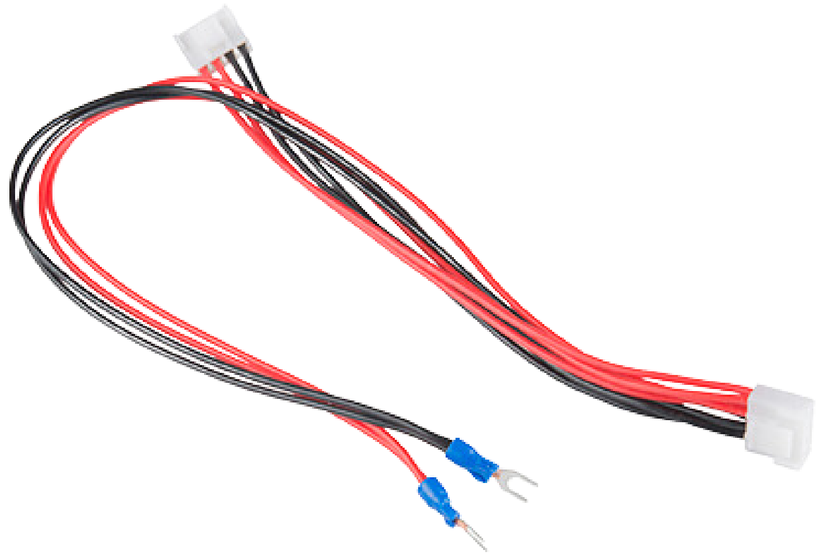

1- Power Cabel



4- Magnet



1- FRC Cable

Soalteemode, Kathmandu

98510939960

flyuptechnology.com